

**UTILITY PATENT APPLICATION TRANSMITTAL UNDER 37 C.F.R. §1.53(b)**

ASSISTANT COMMISSIONER FOR PATENTS  
**Box PATENT APPLICATION**  
 Washington D.C. 20231

Case Docket No.: HI-012

Sir:

Transmitted herewith for filing is the patent application of

INVENTOR OR APPLICATION IDENTIFIER: Hong Joo KIM and Hae Seock YANG

FOR: BELT CLIP DEVICE FOR MOBILE COMMUNICATION TERMINAL UNIT

Enclosed are:

- |  |   |
|--|---|
| <p>1. <input checked="" type="checkbox"/> <u>24</u> pages of specification, claims, abstract</p> <p>2. <input checked="" type="checkbox"/> <u>9</u> sheets of FORMAL drawing.</p> <p>3. <input checked="" type="checkbox"/> <u>2</u> pages of newly executed Declaration &amp; Power of Attorney (original).</p> <p>4. <input checked="" type="checkbox"/> Priority Claimed to Korean Appln. Nos. 33933/1999 and 51991/1999, whose entire disclosures are incorporated herein by reference.</p> <p>5. <input type="checkbox"/> Small Entity Statement.</p> <p>6. <input type="checkbox"/> Information Disclosure Statement, Form PTO-1449 and reference.</p> <p>10. <input checked="" type="checkbox"/> Authorization under 37 C.F.R. §1.136(a)(3).</p> <p>11. <input type="checkbox"/> Other:</p> | <p>7. <input checked="" type="checkbox"/> Assignment Papers for <u>LG Information &amp; Communications, Ltd.</u><br/>             (cover sheet, assignment &amp; assignment fee).</p> <p>8. <input checked="" type="checkbox"/> Certified copy of <u>Korean Patent Application</u><br/>             Nos. <u>33933/1999</u> filed <u>August 17, 1999</u> and <u>51991/1999</u> filed <u>November 22, 1999</u>.</p> <p>9. <input checked="" type="checkbox"/> Two (2) return postcards.<br/> <input checked="" type="checkbox"/> Stamp &amp; Return with Courier.<br/> <input checked="" type="checkbox"/> Prepaid Postcard-Stamped Filing Date &amp; Returned with Unofficial Serial Number.</p> |
|--|---|

CLAIMS AS FILED					
For	No. Filed		No. Extra	Rate	Fee
Total Claims	10	- 20	0	X \$18.00	\$0.00
Indep. Claims	1	- 3	0	X \$78.00	\$0.00
Multiple Dependent Claims (If applicable)				X \$260.00	\$0.00
				BASIC FEE	\$690.00
				TOTAL FILING FEE	\$690.00

☐ This is a Continuation-in-part (CIP) of prior application No: \_\_\_\_\_ filed \_\_\_\_\_. Incorporation By Reference-The entire disclosure of the prior application is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Amend the specification by inserting before the first line the sentence:

-This application is a continuation-in-part of Application Serial No. \_\_\_\_\_ filed \_\_\_\_\_.-

☒ A check in the amount of \$690.00 (Check #9164) is attached.

☐ Please charge my Deposit Account No. 16-0607 in the amount of \$\_. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy is enclosed.

☒ Any additional filing fees required under 37 C.F.R. 1.16.

☒ The Commissioner is hereby authorized to charge payment of following fees during the pendency of this application or credit any overpayment to Deposit Account No. 16-0607. A duplicate copy of this sheet is enclosed.

☒ Any patent application processing fees under 37 C.F.R. 1.17.

☒ Any filing fees under 37 C.F.R. 1.16 for presentation of extra claims.

FLESHNER & KIM, LLP

*Carl R. Wesolowski*

Daniel Y.J. Kim

Registration No. 36,186

Carl R. Wesolowski

Registration No. 40,372

Correspondence Address Below:

P.O. Box 221200

Chantilly, VA 20153-1200

(703) 502-9440 DYK/kan

Date: August 16, 2000

# BELT CLIP DEVICE FOR MOBILE COMMUNICATION TERMINAL UNIT

## BACKGROUND OF THE INVENTION

### 5 Field of the Invention

The present invention relates to a belt clip device for a mobile communication terminal unit, and more particularly to a belt clip device for a mobile communication terminal unit capable of allowing the user to conveniently view the display window of the terminal unit even in a state wearing the terminal unit at his side.

### Description of the Prior Art

Today, mobile communication systems has been rendered to be a necessity in the present society. This has resulted in an increased demand for terminal units of such mobile communication systems. Recently, terminal units having new functions have been developed in order to allow those terminal units to be more conveniently used. In particular, in mobile communication terminal units, the convenience in carrying those terminal units is considered to be important because they are always carried by user on their bodies.

Typically, a mobile communication terminal unit is provided with an LCD panel arranged at the front or top surface of a unit body. The mobile communication terminal unit may also

be provided with a belt clip device in order to allow the user to easily and conveniently carry the terminal unit at his side. The belt clip device also has the function of protecting the terminal unit.

5           Fig. 1 is a side view illustrating a conventional belt clip device for a mobile communication terminal unit.

10           Referring to Fig. 1, the conventional belt clip device mainly includes a terminal unit holder 102 for receiving and holding a terminal unit 101, and a clamp 103 attached to the terminal unit holder 102 at one side of the terminal unit holder 102 and adapted to allow the belt clip device to be mounted to a belt. The clamp 103 has a base portion 103a coupled to the rear surface of the terminal unit holder 102 by means of set screws 104, and a panel portion 103c hingably coupled to the base portion 103a and spaced apart from the base 15 103a by a desired gap by virtue of a plate spring 103d.

20           Where the user desires to carry the terminal unit at his side using the above mentioned conventional belt clip device, he depresses a depressing portion 103b of the clamp 103 against the spring force of the plate spring 103d to sufficiently space the panel portion 103c of the clamp 103 apart from the base portion 103a, thereby forming a sufficient gap therebetween, and then couples the belt clip device to his belt in such a fashion that the belt is fitted into the gap. Since the base 25 portion 103a and panel portion 103c of the clamp 103 are urged

toward each other by the plate spring 103d arranged therebetween, they come into tight contact with the belt in a pressed state, thereby causing the belt clip device to be firmly held on the belt. Accordingly, the user can carry the mobile communication terminal unit 101 in a state in which it is received and held in the terminal unit holder 102.

Meanwhile, it may be often required for the user to view an LCD panel 102, that is, an information display window, of the terminal unit 101 in a state, in which he carries the terminal unit 101 using the belt clip device, in order to confirm the telephone number of a calling party in response to a call from the calling party, a message received from the calling party, or the current time. In this case, however, the user can view only an inclined or inverted image of the information or content displayed on the LCD panel 102. As a result, it is difficult for the user to accurately confirm the displayed information or content. In order to accurately confirm the displayed information or content, there is an inconvenience in that the user must view it after separating the terminal unit 101 from the terminal unit holder 102.

#### SUMMARY OF THE INVENTION

Therefore, the present invention has been made in view of the above mentioned problems, and an object of the invention is

to provide a belt clip device for a mobile communication terminal unit which includes a terminal unit holder and a clamp hingably connected together, thereby allowing the user to rapidly and accurately view the display window of the terminal unit in a state carrying the terminal unit at his side.

In order to accomplish this object, the present invention provides a belt clip device for a mobile communication terminal unit comprising: a terminal unit holder for receiving and holding the terminal unit; a clamp provided at the terminal unit holder at one side of the terminal unit holder and adapted to resiliently clip a belt worn by a user, thereby allowing the belt clip device to be mounted to the belt; and connecting means for rotatably connecting the clamp to the terminal unit holder.

Preferably, the clamp comprises a base portion, a panel portion hingably coupled at one end thereof to the base portion and spaced apart from the base portion to define a gap for receiving the belt therebetween, a spring adapted to urge the base portion and the panel portion in such a fashion that the gap is resiliently maintained, and a stopper provided at the other end of the panel portion and adapted to prevent the clamp from being separated from the belt.

Alternatively, the clamp may comprise a base portion, a tension panel portion connected at one end thereof to the base portion in such a fashion that it is resiliently supported by

the base portion, the tension panel portion serving to resiliently clip the belt, and a stopper provided at the other end of the tension panel portion and adapted to prevent the clamp from being separated from the belt.

5            Preferably, the connecting means comprises a hinging member arranged between the terminal unit adapter and the clamp, the hinging member being hingably coupled to the base portion of the clamp in such a fashion that it hinges about a hinge shaft with respect to the clamp while being rotatably coupled to the terminal unit holder, and a rotating shaft for rotatably coupling the terminal unit holder to the hinging member in such a fashion that the terminal unit holder rotates about the rotating shaft with respect to the hinging member.

10            The belt clip device may further comprise angular position holding means for holding an angular position of the terminal unit holder with respect to the hinging member.

15            Preferably, the rotating position holding means comprises a hole formed at a surface of the terminal unit holder facing the clamp, a spring-loaded ball received in the hole in such a fashion that it is in contact with a surface of the hinging member contacting the surface of the terminal unit holder in a state urged against the surface of the hinging member, and a plurality of engagement grooves formed at the surface of the hinging member and adapted to in order to allow the spring-

20            loaded ball to be resiliently held at a desired position along

25

a rotating circumference of the spring-loaded ball, whereby the terminal unit holder is resiliently held at an angular position corresponding to a position of the spring-loaded ball received in a selected one of the engagement grooves.

5           Alternatively, the connecting means may comprise a cylindrical rotating shaft holding member provided at one end of the clamp, a spring received in the rotating shaft holding member, a pair of rotating shaft supporting members formed at the terminal unit holder, each of the rotating shaft supporting  
10           members being provided with a plurality of radially extending engagement grooves at an inner surface thereof, and a pair of rotating shafts respectively adapted to rotatably couple the rotating shaft holding member to the rotating shaft supporting  
15           members and fitted in the rotating shaft holding member at opposite sides of the spring received in the rotating shaft holding member in such a fashion that they are axially slidable while being prevented from rotating with respect to the  
20           rotating shaft holding member, each of the rotating shafts being engaged with a selected one of the engagement grooves formed at an associated one of the rotating shaft supporting  
25           members.

          Preferably, each of the rotating shaft supporting members has a recessed structure for receiving and holding one end of an associated one of the rotating shafts, the rotating shaft  
25           end being protruded from the rotating shaft holding member. In

this case, each of the rotating shafts is provided at the one end thereof with an engagement protrusion adapted to engage with a selected one of the engagement grooves formed at an associated one of the rotating shaft supporting members, thereby causing the terminal unit holder to be held at a position defined by the engagement groove engaged with the engagement protrusion with respect to the clamp.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above objects, and other features and advantages of the present invention will become more apparent after a reading of the following detailed description when taken in conjunction with the drawings, in which:

Fig. 1 is a side view illustrating a conventional belt clip device for a mobile communication terminal unit;

Fig. 2 is a side view illustrating a belt clip device for a mobile communication terminal unit in accordance with an embodiment of the present invention;

Fig. 3 is a perspective view illustrating a hinging member included in the belt clip device of Fig. 2;

Fig. 4 is a side view illustrating an upwardly hinged state of the hinging member in the belt clip device of Fig. 2;

Fig. 5 is a side view illustrating a rotated state of a terminal unit holder included in the belt clip device of Fig.



2;

Fig. 6 is an exploded perspective view illustrating a belt clip device for a mobile communication terminal unit in accordance with another embodiment of the present invention;

5 Fig. 7 is a front perspective view illustrating a using condition of the belt clip device of Fig. 6;

10 Fig. 8 is a side view illustrating a state of the belt clip device of Fig. 6, carried by a belt, in which a terminal unit holder and a clamp are in a state folded with respect to each other; and

Fig. 9 is a rear perspective view illustrating a using condition of the belt clip device of Fig. 6.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 Now, preferred embodiments of the present invention will be described in conjunction with the annexed drawings.

20 Referring to Figs. 2 to 5, a belt clip device for a mobile communication terminal unit according to an embodiment of the present invention is illustrated, respectively. As shown in Figs. 2 to 5, the belt clip device includes a terminal unit holder 202 for receiving and holding a terminal unit 201, a clamp 203 connected to the terminal unit holder 202 at one side of the terminal unit holder 202 and adapted to allow the belt clip device to be mounted to a belt, and a connecting means for

25

rotatably connecting the clamp 203 to the terminal unit holder 202.

The clamp 203 has a panel-shaped base portion 203a, and a panel portion 203c hingably coupled at the upper end thereof to the base portion 203a. The panel portion 203c is provided at the upper end thereof with a depressing portion 203b and at the lower end thereof with a stopper. The depressing portion 203b and stopper are integral with the panel portion 203c. A pair of grooves 203d and 203e are formed at respective surfaces of the base 203a and panel portion 203c facing each other. The clamp 203 also includes a plate spring 203f fitted in the grooves 203d and 203e at both ends thereof, respectively. The plate spring 203f serves to space the base 203 and 203c apart from each other by a desired gap.

The connecting means includes a hinging member 207 rotatably coupled to the rear surface of the terminal unit holder 202 and hingably coupled to the base portion 203a of the clamp 203. The hinging member 207 has a pair of inclined portions 207a spaced apart from each other and hingably coupled to opposite side surfaces of the base portion 203a of the clamp 203 by means of a hinge shaft 206, respectively, in order to allow the hinging member 207 to hinge about the hinge shaft 206 with respect to the clamp 203. The hinging member 207 is also provided at its central portion with a through hole 204. The connecting means also includes a rotating shaft 208 fitted in

the through hole 204 of the hinging member 207 in order to allow the terminal unit holder 202 to rotate about the rotating shaft 208 by a desired angle with respect to the hinging member 207. A hole 209 is formed at the rear surface of the terminal unit holder 202 to receive a spring-loaded ball 210 therein. The spring-loaded ball 210 is in contact with the surface of the hinging member 207 facing the rear surface of the terminal unit holder 202 in a state urged against that surface by its spring. At the ball contacting surface of the hinging member 207, first through fourth engagement grooves 211 to 214 uniformly spaced apart from one another are formed in order to allow the spring-loaded ball 210 to be resiliently held at a desired position along a rotating circumference of the spring-loaded ball 210. By virtue of this configuration, the terminal unit holder 202 is resiliently held at an angular position corresponding to the position of the ball 210 received in a selected one of the grooves 211 to 214. In the illustrated case, the engagement grooves 211 to 214 are spaced apart from one another by an angle of 90° so that they define four 90°-spaced angular positions for the terminal unit holder 202, respectively.

Now, the operation of the belt clip device having the above mentioned configuration according to the illustrated embodiment of the present invention will be described. Where the user desires to carry, at his side, the terminal unit 201

held in the terminal unit holder 202, he depresses the depressing portion 203b of the clamp 203 against the spring force of the plate spring 203f to sufficiently space the panel portion 203c of the clamp 203 apart from the base portion 203a, thereby forming a sufficient gap therebetween, and then couples the belt clip device to his belt in such a fashion that the belt is fitted into the gap. Since the base portion 203a and panel portion 203c of the clamp 203 are urged toward each other by the plate spring 203f arranged therebetween, they come into tight contact with the belt in a pressed state, thereby causing the belt clip device to be firmly held on the belt. Accordingly, the user can carry the mobile communication terminal unit 201 in a state in which it is received and held in the terminal unit holder 202.

Meanwhile, when the user desires to view an LCD panel 220 of the terminal unit 201 in a state, in which he carries the terminal unit 201 held in the terminal unit holder 202, in order to confirm the information or content displayed on the LCD panel 220, he upwardly hinges the terminal unit holder 202 about the hinge shaft 206 with respect to the base portion 203a of the clamp 203 while gripping the terminal unit holder 202, until the terminal unit 201 is horizontally positioned. In this state, the user can downwardly view the LCD panel 220, so that he can easily and accurately confirm the displayed information or content.

If the image of the information or content displayed on the LCD panel 102 is viewed in a laterally-rotated or inverted state, the user then rotates the terminal unit holder 202 about the rotating shaft 208 with respect to the hinging member 207 so as to view that image in a normal state. As the user rotates the terminal unit holder 202 in one direction, the spring-loaded ball 210, which has been in a state resiliently engaged with the first engagement groove 211, is separated from the first engagement groove 211, and then resiliently engaged with an associated one of the second and fourth engagement grooves 212 and 214, thereby causing the terminal unit holder 202 to be positioned at a position rotated 90 from the initial position thereof where it is longitudinally aligned with the hinging member 207. As the terminal unit holder 202 is further rotated in the same direction as mentioned above, the spring-loaded ball 210 is separated from the second or fourth engagement groove 212 or 214, and then resiliently engaged with the third engagement grooves 213, thereby causing the terminal unit holder 202 to be positioned at a position rotated 180 from the initial position thereof. Thus, the user can more accurately and conveniently view the information or content displayed on the LCD panel 200 in the rotated position of the terminal unit 201 corresponding to the second, third or, fourth engagement groove 212, 213, or 214 in a state in which an unintentional rotation of the terminal unit holder 202 from the rotated

position is prevented by virtue of the engagement between the spring-loaded ball 210 and the associated engagement groove.

In accordance with the illustrated embodiment, the user can rapidly and accurately confirm the information or content displayed on the LCD panel 220 in a state held by the terminal unit holder 202 in that he can view the displayed information or content at a convenient position defined by hinging the hinging member 207 operatively connected to the terminal unit holder 202 by a desired angle, and, if necessary, rotating the terminal unit holder 202 about the rotating shaft 208 with respect to the hinging member 207 by a desired angle.

Referring to Figs. 6 to 9, a belt clip device for a mobile communication terminal unit according to another embodiment of the present invention is illustrated, respectively.

As shown in Figs. 6 to 9, the belt clip device includes a terminal unit holder 301 for receiving and holding the terminal unit 201, a clamp 500 connected to the terminal unit holder 301 at one side of the terminal unit holder 301 and adapted to allow the belt clip device to be mounted to a belt, and a connecting means for rotatably connecting the clamp 500 to the terminal unit holder 301.

The clamp 500 has a panel-shaped base portion 501, and a tension panel portion 503 integrally formed with the base portion 501. The tension panel portion 503 is connected at one

end thereof to the base portion 501 in such a fashion that it is resiliently supported by the base portion 501. The tension panel portion 503 is also provided with a wedge-shaped stopper 502 in the vicinity of the other end thereof. The base portion 501 has an opening through which the wedge-shaped stopper is slightly protruded toward the terminal unit holder 301. By virtue of the wedge-shaped stopper 502, the tension panel portion 503 of the clamp 500 serves to clip the belt, thereby allowing the belt clip device to be separably mounted to the belt.

The connecting means includes a cylindrical rotating shaft holding member 401 provided at one end of the clamp 500 in such a fashion that it is integral with the clamp 500, a compression coil spring 402 received in the rotating shaft holding member 401, and a pair of spaced rotating shafts 403 fitted in the rotating shaft holding member 401 at opposite sides of the compression coil spring 402 received in the rotating shaft holding member 401 in such a fashion that they are axially slidable while being prevented from rotating with respect to the rotating shaft holding member 401. Each rotating shaft 403 is provided at its outer end with an engagement protrusion 403a. The connecting means also includes a pair of spaced rotating shaft supporting members 404 formed at a desired portion, for example, an upper end, of the terminal unit holder 301. Each rotating shaft supporting member 404 has a recessed

structure for receiving the outer end of an associated one of the rotating shafts 403. The rotating shaft supporting member 404 is provided with a plurality of radially extending engagement grooves 404a at the inner bottom surface thereof.

5 The engagement protrusion 403a of each rotating shaft 403 is resiliently engaged with one of the engagement grooves 404a of an associated one of the rotating shaft supporting members 404, thereby causing the terminal unit holder 301 to be held at a position defined by the engagement groove 404a engaged with the engagement protrusion 403a with respect to the clamp 500.

10 The operation of the belt clip device having the above mentioned configuration according to the second embodiment of the present invention will be described.

15 Since the tension panel portion 503 of the clamp 500 has the wedge-shaped stopper 502, a slight gap is defined between the base portion 501 and tension panel portion 503 of the clamp 500 at the stopper-arranged portion of the clamp 500 in order to allow an insertion of the belt therebetween. Once the belt is forcedly inserted into the gap of the clamp 500 in such a fashion that the clamp 500 clips the belt, the clamp 500 is 20 firmly held by the belt by virtue of a tension generated by the tension panel portion 503. In particular, the clamp 500 is prevented from being easily separated from the belt by virtue of the wedge-shaped stopper 502.



Meanwhile, the engagement protrusion 403a of each rotating shaft 403 is in a state resiliently engaged with one of the engagement grooves 404a of an associated one of the rotating shaft supporting member 404 by virtue of the compression coil spring 402, so that the terminal unit holder 301 is held at a position defined by the engagement groove 404a engaged with the engagement protrusion 403a with respect to the clamp 500. When an external rotating force exceeding the spring force of the compression coil spring 402 is applied to the terminal unit holder 301, each rotating shaft supporting member 404 is rotated about an associated one of the rotating shafts 403 with respect to the clamp 500 in such a fashion that the engagement protrusion 403a of the rotating shaft 403 slides circumferentially along the engagement grooves 404a of the rotating shaft supporting member 404. When the external rotating force applied to the terminal unit holder 301 is released, the terminal unit holder 301 is held at a position defined by one of the engagement groove 404a engaged with the engagement protrusion 403a. Thus, it is possible to hold the terminal unit holder 301 at a position rotated by an optional angle with respect to the clamp 500.

Since the terminal unit holder 301 can be held at an optional angular position with respect to the clamp 500, there is also an advantage in that the terminal unit 201 can be maintained in an upright status on a table in order to allow

the user to conveniently view the LCD panel 220 of the terminal unit 201, as shown in Fig. 7.

In a state in which the terminal unit 201 is carried by the belt of the user, the belt clip device is maintained in such a fashion that the terminal unit holder 301 and clamp 500 are in a state folded with respect to each other, in order to allow the user to conveniently carry the terminal unit 201. When the user desires to view the LCD panel 220 of the terminal unit 201 in a state, in which he carries the terminal unit 201 held in the terminal unit holder 202, in order to confirm the information or content displayed on the LCD panel 220, he adjusts the angle of the terminal unit holder 301 with respect to the clamp 500, as shown in Fig. 9 by upwardly rotating the terminal unit holder 202 about the rotating shafts 403. Accordingly, the user can view the LCD panel 220 without separating the terminal unit 201 from the terminal unit holder 301 to confirm the information or content displayed on the LCD panel 220.

As apparent from the above description, the present invention provides a belt clip device for a mobile communication terminal unit including a terminal unit holder and a clamp hingably or rotatably connected together in such a fashion that they are hinged or rotated between a folded state allowing the user to conveniently carry the terminal unit by a belt and a developed state allowing the user to conveniently

view a display window of the terminal unit without separating the terminal unit from the terminal unit holder.

Although the preferred embodiments of the invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

WHAT IS CLAIMED IS:

1. A belt clip device for a mobile communication terminal unit comprising:

5       a terminal unit holder for receiving and holding the terminal unit;

10       a clamp provided at the terminal unit holder at one side of the terminal unit holder and adapted to resiliently clip a belt worn by a user, thereby allowing the belt clip device to be mounted to the belt; and

      connecting means for rotatably connecting the clamp to the terminal unit holder.

15       2. The belt clip device according to claim 1, wherein the clamp comprises:

      a base portion;

      a panel portion hingably coupled at one end thereof to the base portion and spaced apart from the base portion to define a gap for receiving the belt therebetween; and

20       a spring adapted to urge the base portion and the panel portion in such a fashion that the gap is resiliently maintained.

25       3. The belt clip device according to claim 2, wherein the clamp further comprises a stopper provided at the other end of

the panel portion and adapted to prevent the clamp from being separated from the belt.

4. The belt clip device according to claim 1, wherein the  
5 clamp comprises:

a base portion; and

a tension panel portion connected at one end thereof to  
the base portion in such a fashion that it is resiliently  
supported by the base portion, the tension panel portion  
10 serving to resiliently clip the belt.

5. The belt clip device according to claim 4, wherein the  
clamp further comprises a stopper provided at the other end of  
the tension panel portion and adapted to prevent the clamp from  
15 being separated from the belt.

6. The belt clip device according to claim 1, wherein the  
connecting means comprises:

a hinging member arranged between the terminal unit  
20 adapter and the clamp, the hinging member being hingably  
coupled to the base portion of the clamp in such a fashion that  
it hinges about a hinge shaft with respect to the clamp while  
being rotatably coupled to the terminal unit holder; and

a rotating shaft for rotatably coupling the terminal unit  
25 holder to the hinging member in such a fashion that the

terminal unit holder rotates about the rotating shaft with respect to the hinging member.

7. The belt clip device according to claim 6, further comprising:

angular position holding means for holding an angular position of the terminal unit holder with respect to the hinging member.

8. The belt clip device according to claim 7, wherein the rotating position holding means comprises:

a hole formed at a surface of the terminal unit holder facing the clamp;

a spring-loaded ball received in the hole in such a fashion that it is in contact with a surface of the hinging member contacting the surface of the terminal unit holder in a state urged against the surface of the hinging member; and

a plurality of engagement grooves formed at the surface of the hinging member and adapted to in order to allow the spring-loaded ball to be resiliently held at a desired position along a rotating circumference of the spring-loaded ball;

whereby the terminal unit holder is resiliently held at an angular position corresponding to a position of the spring-loaded ball received in a selected one of the engagement grooves.

9. The belt clip device according to claim 1, wherein the connecting means comprises:

a cylindrical rotating shaft holding member provided at  
5 one end of the clamp;

a spring received in the rotating shaft holding member;

a pair of rotating shaft supporting members formed at the  
terminal unit holder, each of the rotating shaft supporting  
members being provided with a plurality of radially extending  
10 engagement grooves at an inner surface thereof; and

a pair of rotating shafts respectively adapted to  
rotatably couple the rotating shaft holding member to the  
rotating shaft supporting members and fitted in the rotating  
shaft holding member at opposite sides of the spring received  
15 in the rotating shaft holding member in such a fashion that  
they are axially slidable while being prevented from rotating  
with respect to the rotating shaft holding member, each of the  
rotating shafts being engaged with a selected one of the  
engagement grooves formed at an associated one of the rotating  
20 shaft supporting members.

10. The belt clip device according to claim 9, wherein  
each of the rotating shaft supporting members has a recessed  
structure for receiving and holding one end of an associated  
25 one of the rotating shafts, the rotating shaft end being

protruded from the rotating shaft holding member, and each of the rotating shafts is provided at the one end thereof with an engagement protrusion adapted to engage with a selected one of the engagement grooves formed at an associated one of the rotating shaft supporting members, thereby causing the terminal unit holder to be held at a position defined by the engagement groove engaged with the engagement protrusion with respect to the clamp.



## ABSTRACT OF THE DISCLOSURE

Disclosed is a belt clip device for a mobile communication terminal unit including a terminal unit holder for receiving and holding the terminal unit, a clamp provided at the terminal unit holder at one side of the terminal unit holder and adapted to resiliently clip a belt worn by a user, thereby allowing the belt clip device to be mounted to the belt, and a connector for rotatably connecting the clamp to the terminal unit holder. The clamp includes a base portion, a panel portion hingably coupled at one end thereof to the base portion and spaced apart from the base portion to define a gap for receiving the belt therebetween, a spring adapted to urge the base portion and the panel portion in such a fashion that the gap is resiliently maintained, and a stopper provided at the other end of the panel portion and adapted to prevent the clamp from being separated from the belt. The connector includes a hinging member hingably coupled to the base portion of the clamp to hinge about a hinge shaft with respect to the clamp, and a rotating shaft for rotatably coupling the terminal unit holder to the hinging member in such a fashion that the terminal unit holder rotates about the rotating shaft with respect to the hinging member. By this configuration, the user can conveniently view a display window of the terminal unit without separating the terminal unit from the terminal unit holder.

Fig. 1

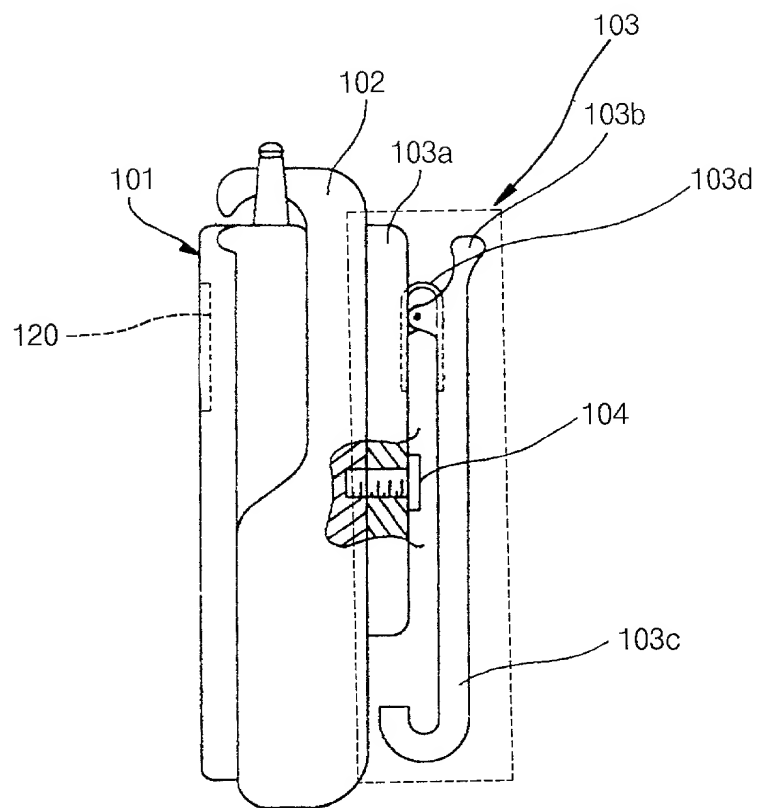


Fig. 2

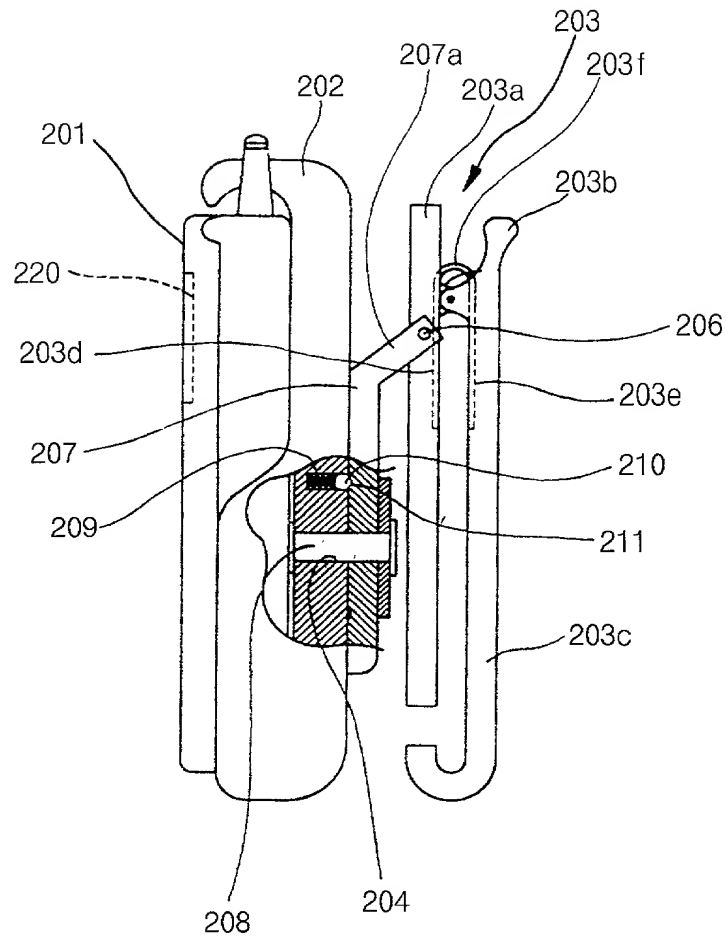


Fig. 3

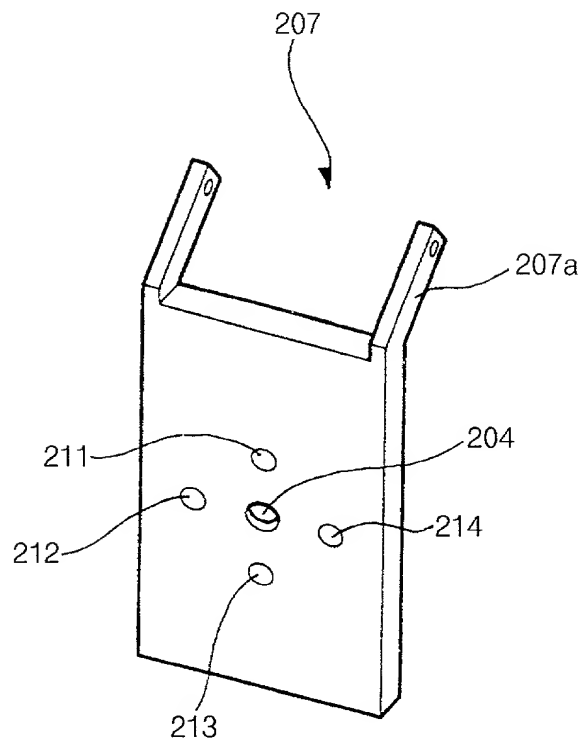


Fig. 4

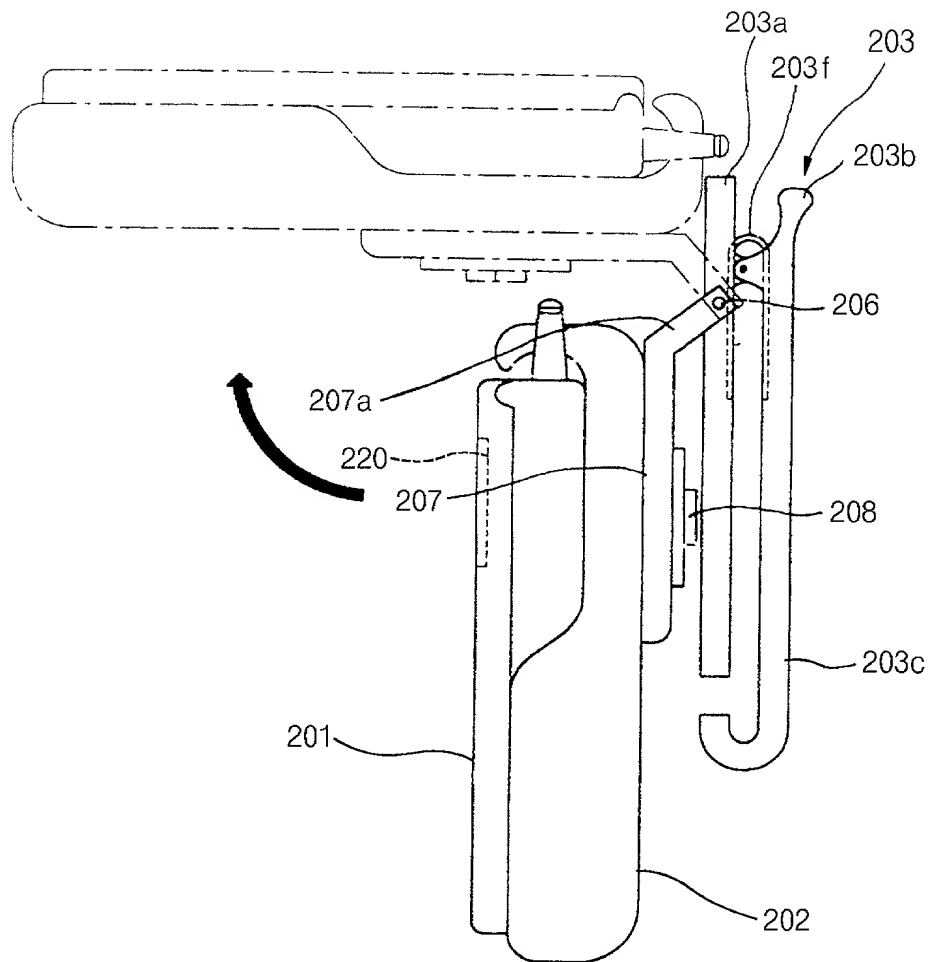


Fig. 5

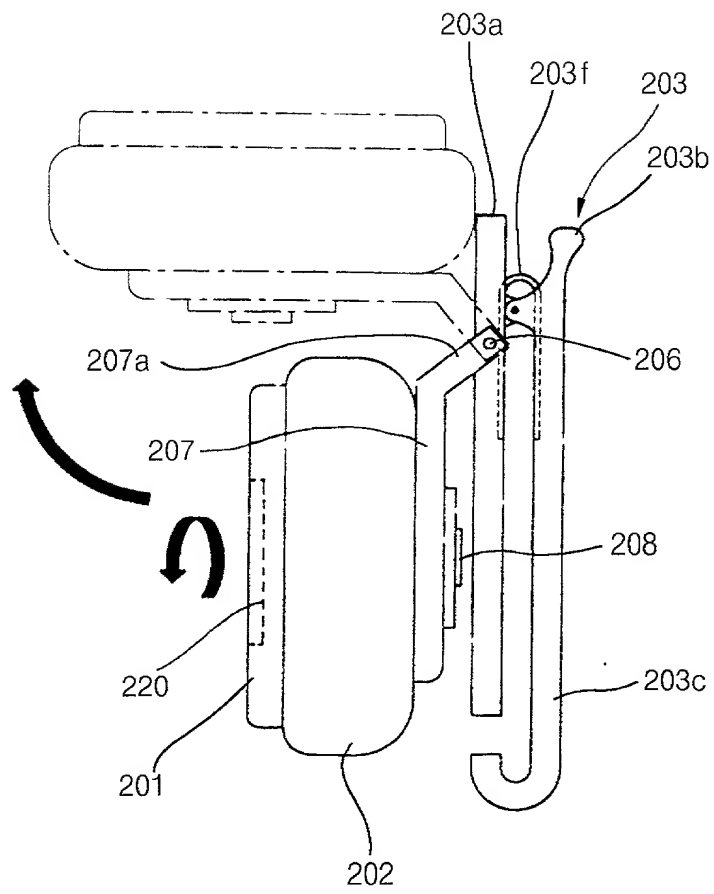


Fig. 6

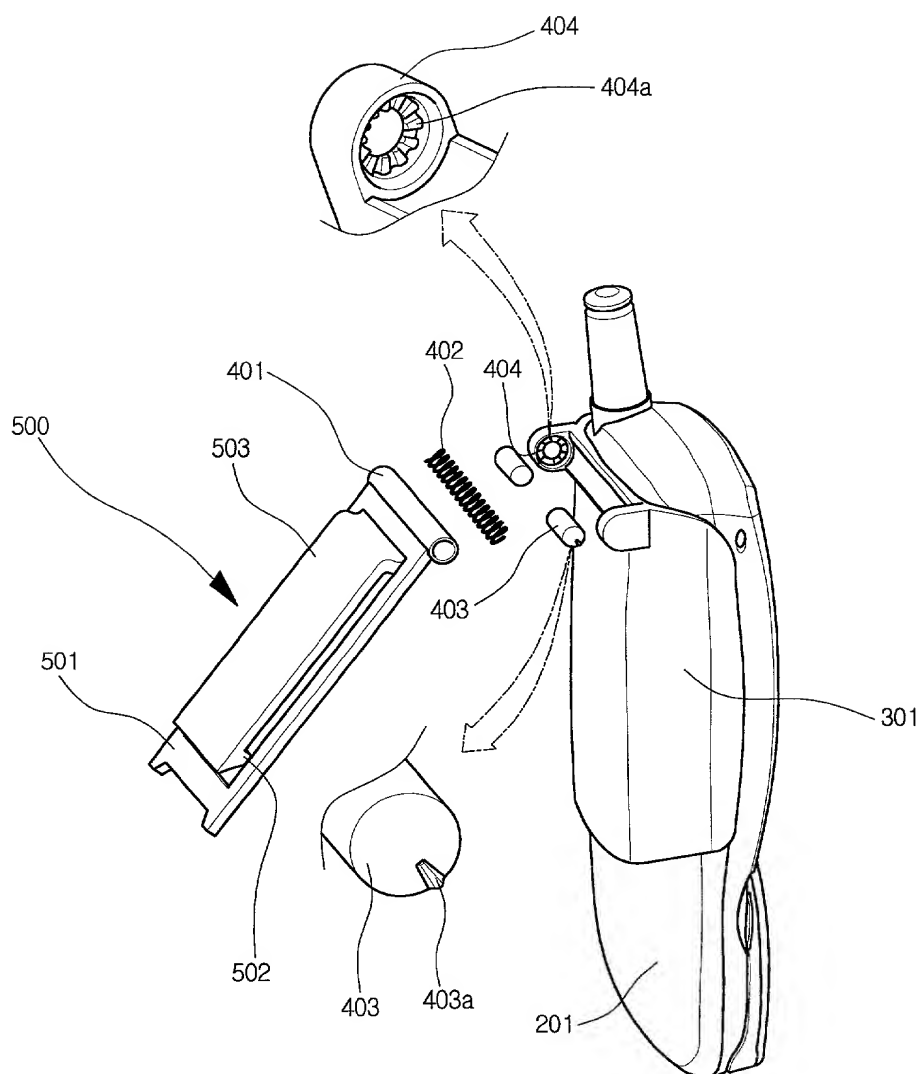


Fig. 7

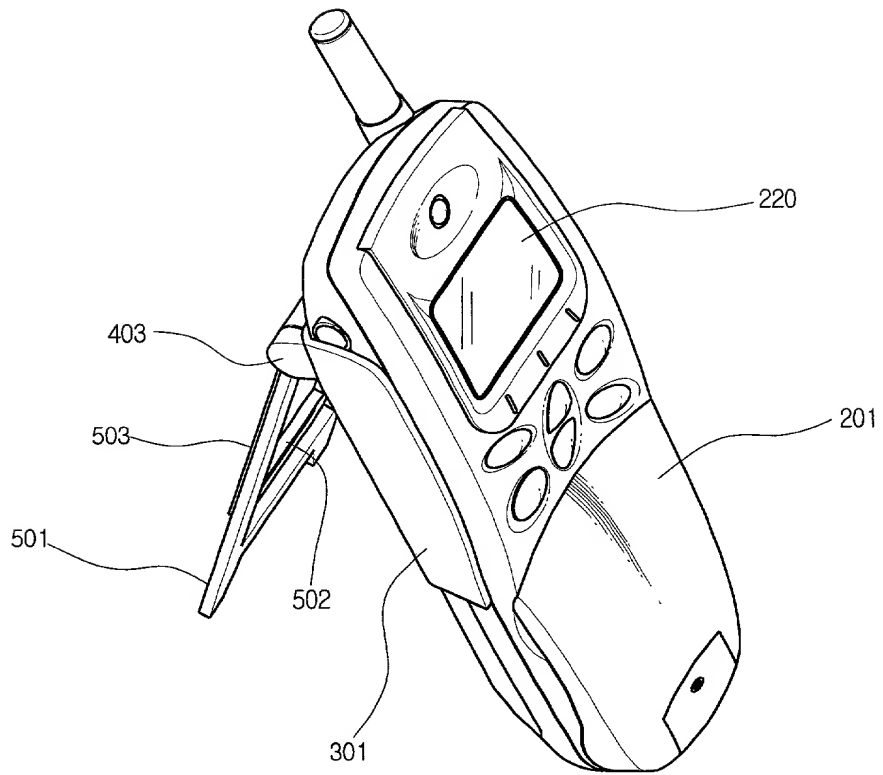




Fig. 8


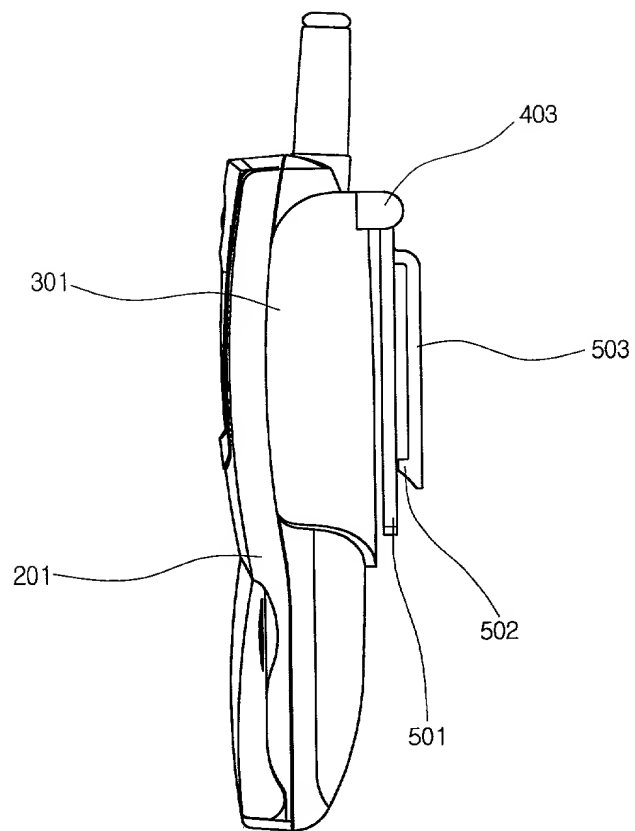


Fig. 9

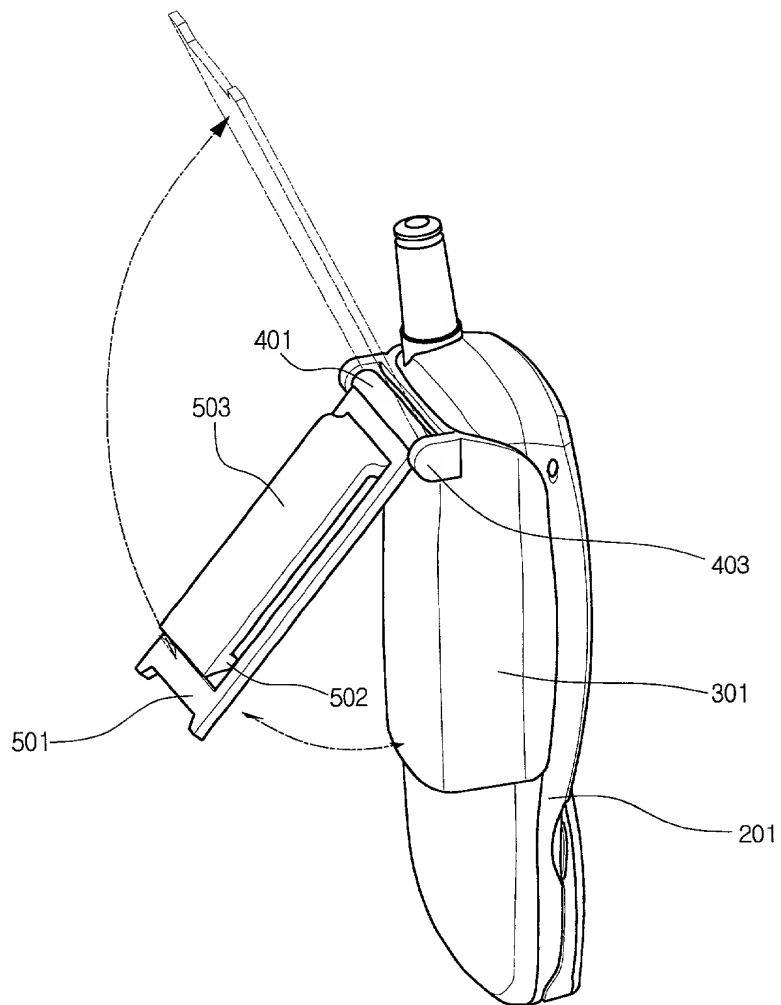

Docket No.:

**DECLARATION AND POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled BELT CLIP DEVICE FOR MOBILE COMMUNICATION TERMINAL UNIT, the specification of which

☒ [X] is attached hereto ☐ [ ] was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of a PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s): Number	Country	Foreign Filing Date Month/Day/Year
33933/1999	Republic of Korea	August 17, 1999
51991/1999	Republic of Korea	November 22, 1999

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s):	Filing Date(Month/Day/Year)

I hereby claim the benefit under 35, U. S. C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U. S. C. 122, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Prior U.S. Application or PCT Parent Number	Filing Date(Month/Day/Year)	Parent Patent Number (if applicable)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false

statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Daniel Y.J. Kim, Registration No. 36,186 and Mark L. Fleshner, Registration No. 34,596; Carl R. Wesolowski, Registration No. 40,372, John C. Eisenhart, Registration No. 38,128, Rene A. Vasquez, Registration No. 38,647; Stuart I. Smith, Registration No. 42,159; Carol L. Druzick, Registration No. 40,287; Anthony H. Nourse, Registration No. 46,121; and Margaret A. Burke, Registration No. 34,474, all of

FLESHNER & KIM, LLP  
P. O. Box 221200  
Chantilly, Virginia 20153-1200

with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to them.

Full name of sole or first inventor: Hong Joo KIM

Inventor's signature: *Hong Joo Kim*

Date: Aug 12, 2000

Residence: Seoul, Korea

Citizenship: Republic of Korea

Post Office Address: Daekyo APT 5-717, 41, Yoido-dong, Youngdungpo-gu, Seoul, Korea

Full name of joint inventor(s): Hae Seock YANG

Inventor's signature: *Hae Seock Yang*

Date: August 12, 2000

Residence: Kyunggi-do, Korea

Citizenship: Republic of Korea

Post Office Address: 89-16, Sanbon 1 dong, Koonpo-City, Kyunggi-do, Korea

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship:

Post Office Address:

Full name of joint inventor(s):

Inventor's signature:

Date:

Residence:

Citizenship: Republic of Korea

Post Office Address: